


RoHS Compliant

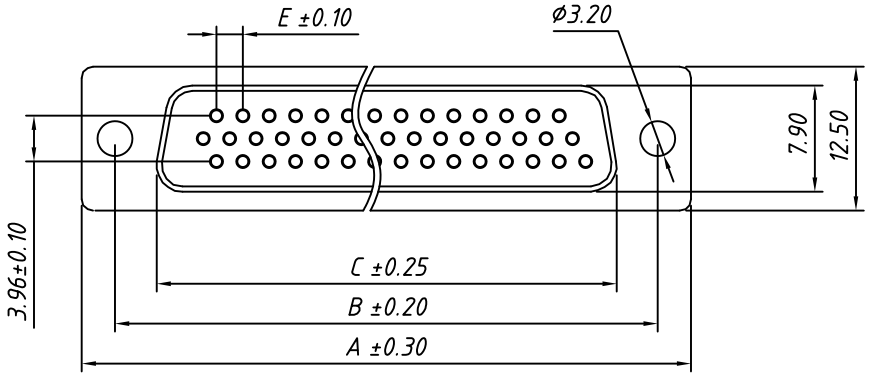

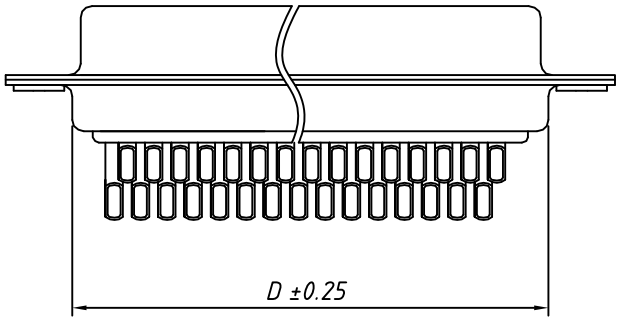

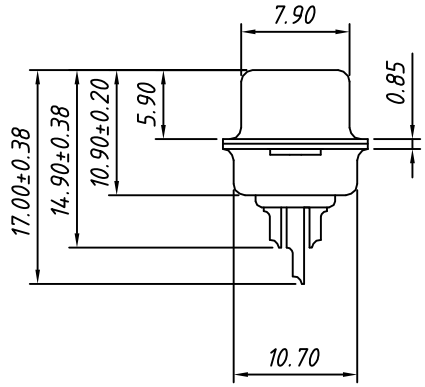

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,
Gold Plating on Contact Arer,
Tin on Solder Tail.
Shell: Steel,
Front Shell Nickel Plating,
Back Shell Tin Plating

Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20mΩ Max. Initial
Operating Temperature: -55°C~+105°C

Order Information


L - KLS1 - 214 - XX - F - X


- L: RoHS
- KLS1: D-SUB Connector, 3 Row Solder type
- 214: Number of Contacts
- XX: Number of Contacts
- F: Connector type: F-Female
- X: Housing Color: B-Black L-Blue W-White


Number of Contacts	DIMENSION				
	A±0.30	B±0.20	C±0.25	D±0.25	E±0.10
15	30.80	25.00	16.30	19.30	2.29
26	39.20	33.30	24.60	27.60	2.29
44	53.10	47.04	38.30	41.10	2.29
62	69.34	63.50	54.80	57.30	2.41

GENERAL TOLERANCE	PROJECTION		Description: D-SUB Connector, Solder Type,Female
X. ±0.30	UNITS	mm	
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Daniel	KLS P/N: L-KLS1-214-XX-F-X
ANGLE TOLERANCE	Check by:	Daniel	
X. ±3°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,LTD.
.X ±2°	SHEET	1 OF 1	
.XX ±1°			

RoHS Compliant

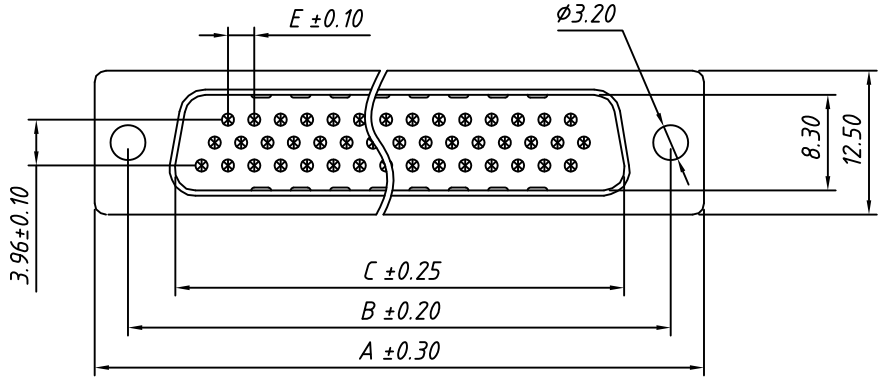

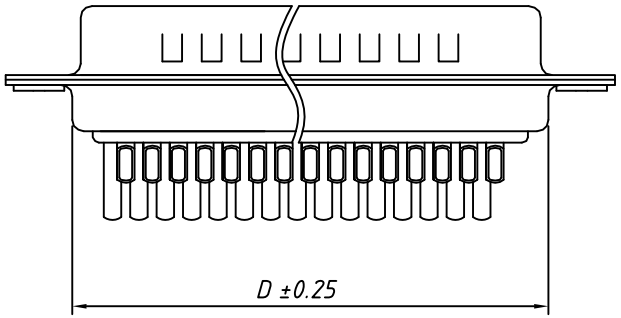

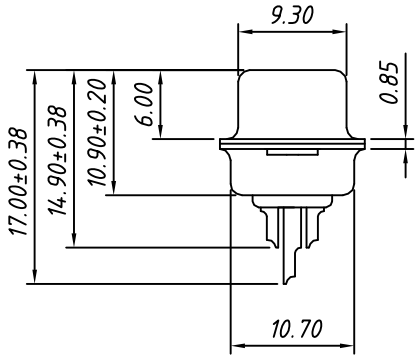

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,
Gold Plating on Contact Arer,
Tin on Solder Tail.
Shell: Steel,
Front Shell Nickel Plating,
Back Shell Tin Plating

Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20mΩ Max. Initial
Operating Temperature: -55°C~+105°C

Order Information

L - KLS1 - 214 - XX - M - X

RoHS
D-SUB Connector,
3 Row Solder type
Number of Contacts
Connector type: M-Male
Housing Color:
B-Black L-Blue W-White

Number of Contacts	DIMENSION				
	A±0.30	B±0.20	C±0.25	D±0.25	E±0.10
15	30.80	25.00	16.90	19.30	2.29
26	39.20	33.30	25.25	27.60	2.29
44	53.10	47.04	38.96	41.10	2.29
62	69.34	63.50	55.40	57.30	2.41

GENERAL TOLERANCE	PROJECTION		Description: D-SUB Connector, Solder Type,Male
X. ±0.30	UNITS	mm	
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Daniel	KLS P/N: L-KLS1-214-XX-M-X
ANGLE TOLERANCE	Check by:	Daniel	
X. ±3°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,LTD.
.X ±2°	SHEET	1 OF 1	
.XX ±1°			