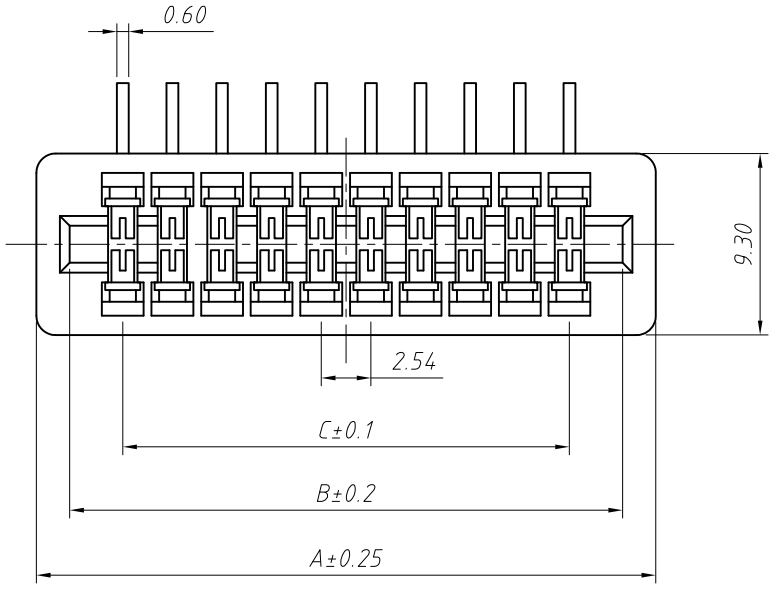

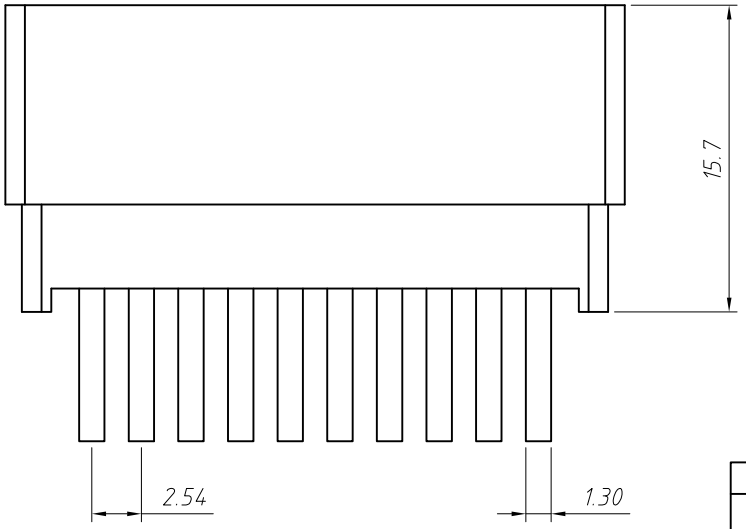

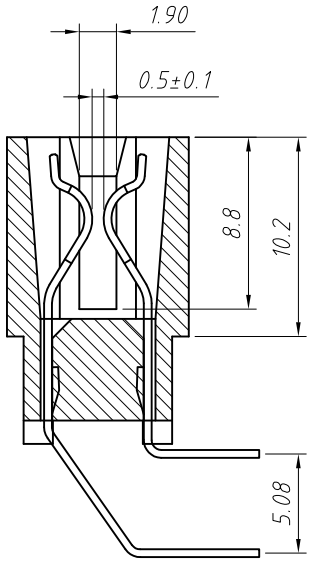

Order Information:

L-KLS1-603C-XX-R

- L: RoHS
- XX-No.of 10-100pin
- Type:
  - S-Straight pin
  - R-Right Angle Pin

Material:

Insulator:Glass filled PBT UL94V-0,Black

Contacts:Brass or Phosphor Bronze

Plating:Contact gold and Cutting Tin over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance:30mΩ Max.at DC 100mA

Insulation Resistance:1000MΩ Min.at 500V DC

Withstanding Voltage:1000V AC /rms 50Hz for 1 minute

Operating Temperature: -45° C ~ +105° C

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.60	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		Description:
X. ±0.15	X. ±5°	UNITS	mm	2.54mm Pitch Edge Card Connector Slot PCB Dip 90 Type
.X ±0.03	.X ±3°	SHEET SIZE	A4	
.XX ±0.05	.XX ±2°		KLS P/N:	L-KLS1-603C-XX-R

Draw by:	Jenny	Date:	2018-03-10	NingBo KLS ELECTRONIC CO.,LTD.	
Check by:		Date:	2018-03-10		
SCALE		SHEET	1	OF	1

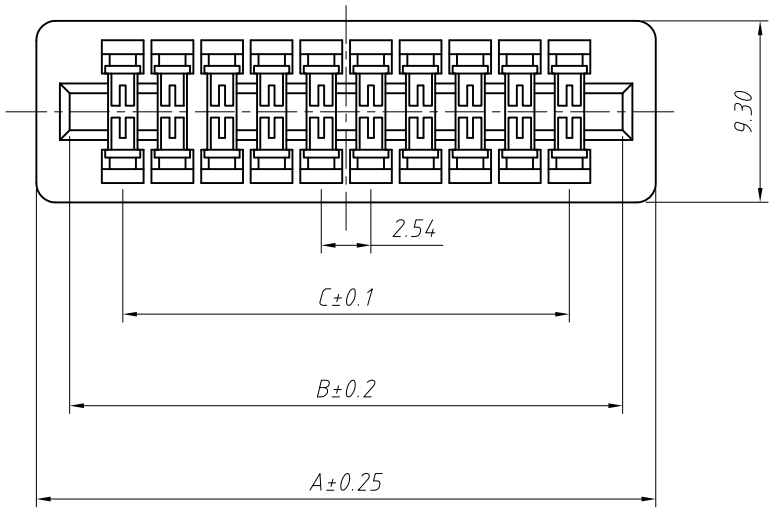

Order Information:

L-KLS1-603C-XX-S

L: RoHS

XX-No.of 10-100pin

Type:

S-Straight pin

R-Right Angle Pin

Material:

Insulator:Glass filled PBT UL94V-0,Black

Contacts:Brass or Phosphor Bronze

Plating:Contact gold and Cutting Tin over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance:30mΩ Max.at DC 100mA

Insulation Resistance:1000MΩ Min.at 500V DC

Withstanding Voltage:1000V AC /rms 50Hz for 1 minute

Operating Temperature: -45° C ~ +105° C

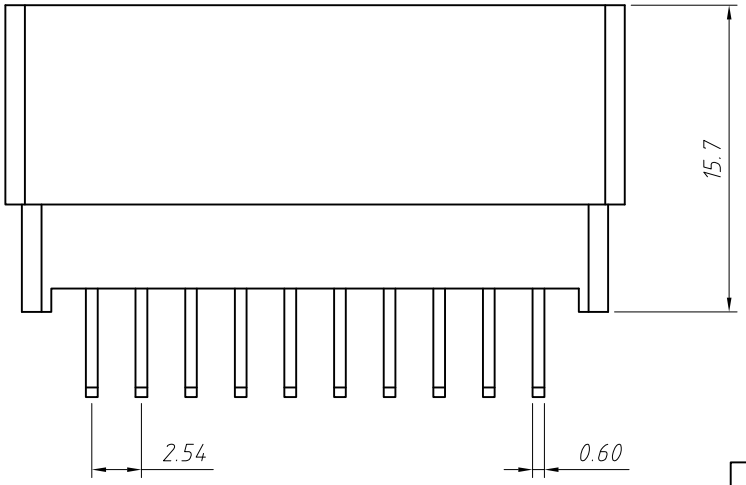

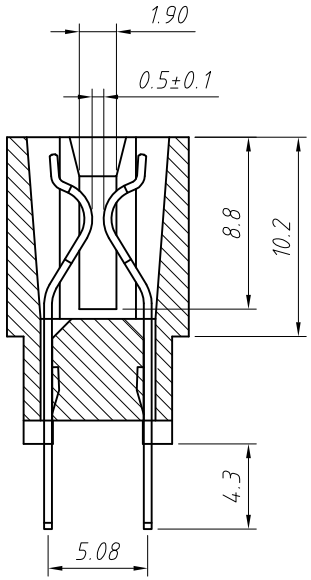

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.60	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		Description:
X. ±0.15	X. ±5°	UNITS	mm	2.54mm Pitch Edge Card Connector Slot PCB Dip 180 Type
.X ±0.03	.X ±3°	SHEET SIZE	A4	
.XX ±0.05	.XX ±2°		KLS P/N:	L-KLS1-603C-XX-S

Draw by:	Jenny	Date:	2018-03-10	NingBo KLS ELECTRONIC CO.,LTD.	
Check by:		Date:	2018-03-10		
SCALE		SHEET	1	OF	1