

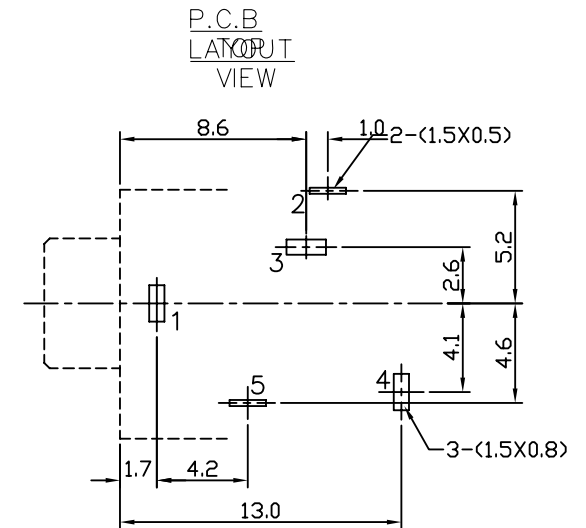
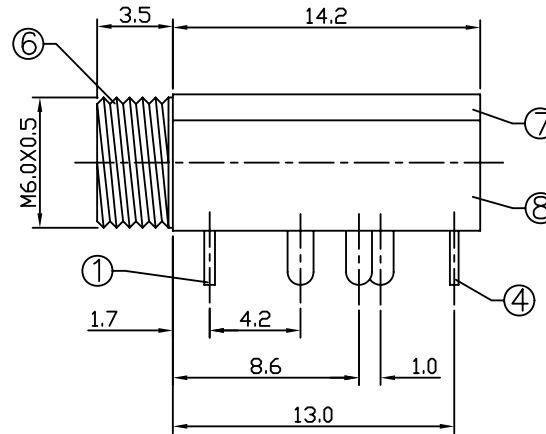


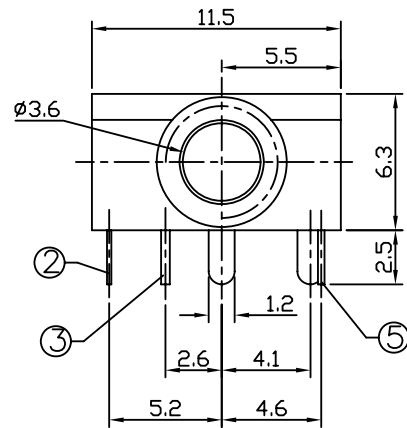


SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-20N;
- 6.life test: 5,000 cycles.

8	HOUSING	1	PA66 /PBT	
7	COVER	1	PC	
6	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
5	5#CONTACT	1	PHOSPHOR BRONZE	Cu-Sn-Plating
4	4#CONTACT	1	H62 BRASS	Cu-Sn-Plating
3	3#CONTACT	1	H62 BRASS	Cu-Sn-Plating
2	2#CONTACT	1	PHOSPHOR BRONZE	Cu-Sn-Plating
1	1#CONTACT	1	H62 BRASS	Cu-Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		MODEL NO:		PAPER NO: 1
		PHONE JACK		L-KLS1-TSJ3.5-024
		DESIGNER		KLS ELECTRONIC CO., LTD
		BY CHECK		
BY APPROVED				