
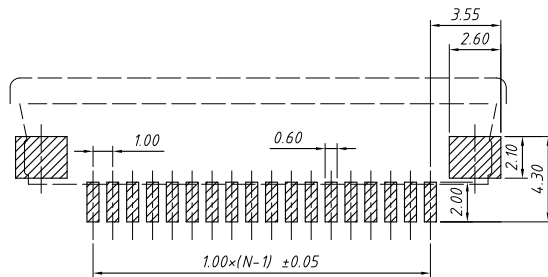



Proper Cable

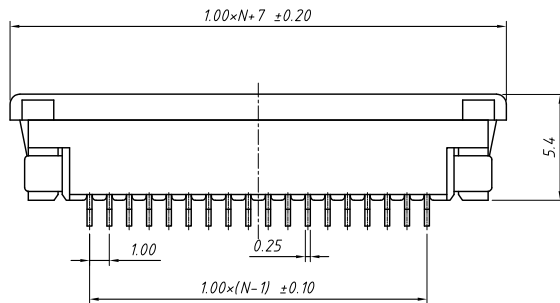

PCB Layout

Material
Housing: LCP, UL 94 V-0

Electrical
Voltage rating: 50 V
Current rating: 0.4 A
Withstanding Voltage: 200 V
Insulation resistance: 500M Ω .Min.
Contact resistance: 20 m Ω .max.

Mechanical
Temp. Range: -20 °C ~ + 80 °C

Order Information

L-KLS1-	1240N	- 2.5-	XX	-T-U-R	
					Pack:
					T-Tube R-Reel
					U-Upper Contact
					T-SMT Pin
					No.Of pins
					(04 ~ 40 pins)
					Height: 2.5mm
					Series No.
					Pos. NO.
					RoHS

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	mm
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	A4
.XX ± 0.05	.XX $\pm 2^\circ$	KLS P/N:	L-KLS1-1240N-2.5-XX-T-U-R

Draw by: Date 2018-03-10



Check by: Date 2018-03-10

SCALE SHEET OF






NingBo KLS ELECTRONIC CO.,L TD.

CONN FFC 1.00mm,
SMD,Horizontal, Upper Contact ,with ZIF

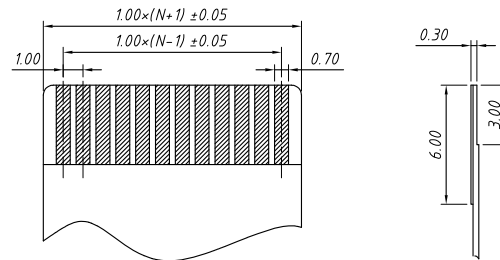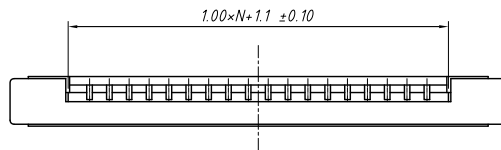

Proper Cable

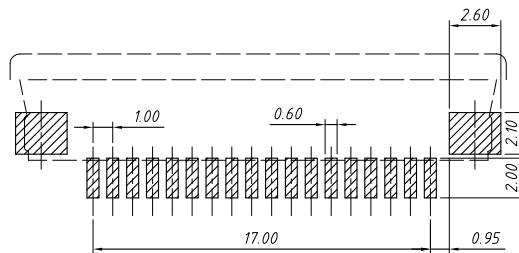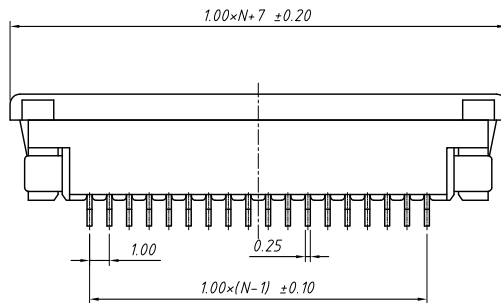

PCB Layout

Material
Housing: LCP UL 94 V-0
Terminal: Phosphor Bronze, Tin
Lock: LCP UL 94 V-0
Soldering: Phosphor Bronze, Tin

Electrical
Voltage rating: 50 V
Current rating: 0.4 A
Withstanding Voltage: 200 V
Insulation resistance: 500 MΩ.Min.
Contact resistance: 20 mΩ.max.

Mechanical
Temp. Range: -20 °C ~ + 80 °C

Order Information

L-KLS1- 1240Q - 2.5- XX -T-L-R

Pack:
T-Tube R-Reel

L-Lower Contact

T-SMT Pin

No.Of pins
(04 ~ 40 pins)

Height: 2.5mm

Series No.

Pos. NO.

RoHS

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.15	X. ±5°	UNITS	mm
.X ±0.03	.X ±3°	SHEET SIZE	A4
.XX ±0.05	.XX ±2°	KLS P/N:	L-KLS1-1240Q-2.5-XX-T-L-R

Draw by: Date 2018-03-10

Check by: Date 2018-03-10

SCALE SHEET OF



NingBo KLS ELECTRONIC CO.,L TD.