
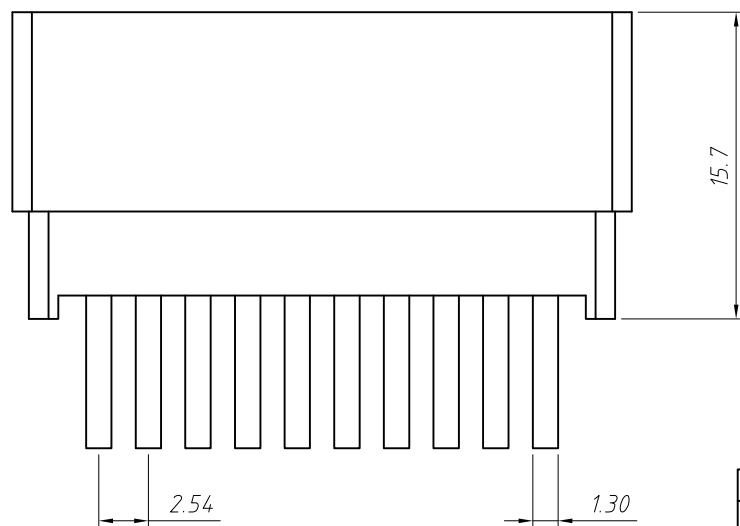


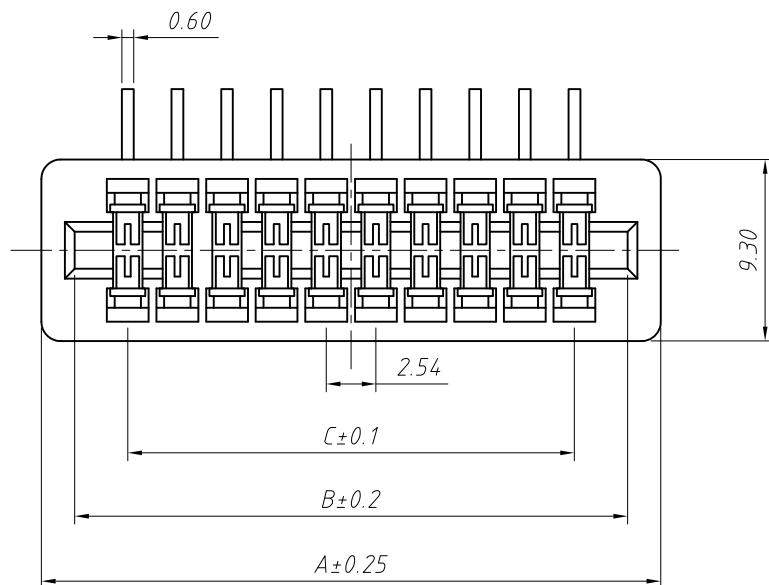

Order Information:

L-KLS1-603C-XX-R

L: RoHS

XX-No. of 10-100pin

Type:

S-Straight pin

R-Right Angle Pin

Material:

Insulator: Glass filled PBT UL 94V-0, Black

Contacts: Brass or Phosphor Bronze

Plating: Contact gold and Cutting Tin over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance: 30mΩ Max. at DC 100mA


Insulation Resistance: 1000MΩ Min. at 500V DC

Withstanding Voltage: 1000V AC /rms 50Hz for 1 minute


Operating Temperature: -45°C ~ +105°C

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.60	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

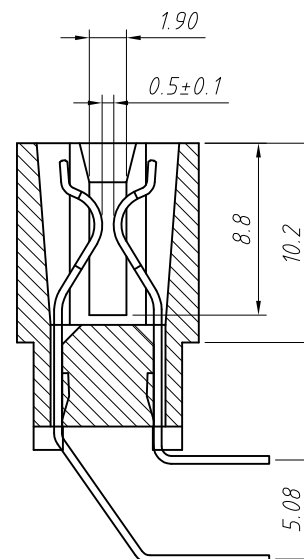

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION			Description:	
X. ±0.15			X. ±5°			UNITS		mm		2.54mm Pitch Edge Card Connector Slot PCB Dip 90 Type L-KLS1-603C-XX-R
.X ±0.03			.X ±3°			SHEET SIZE		A4		
.XX ±0.05			.XX ±2°					KLS P/N:		
Draw by:		Jenny		Date:		2018-03-10		 NingBo KLS ELECTRONIC CO.,L TD.		
Check by:				Date:		2018-03-10				
SCALE				SHEET		1 OF 1				

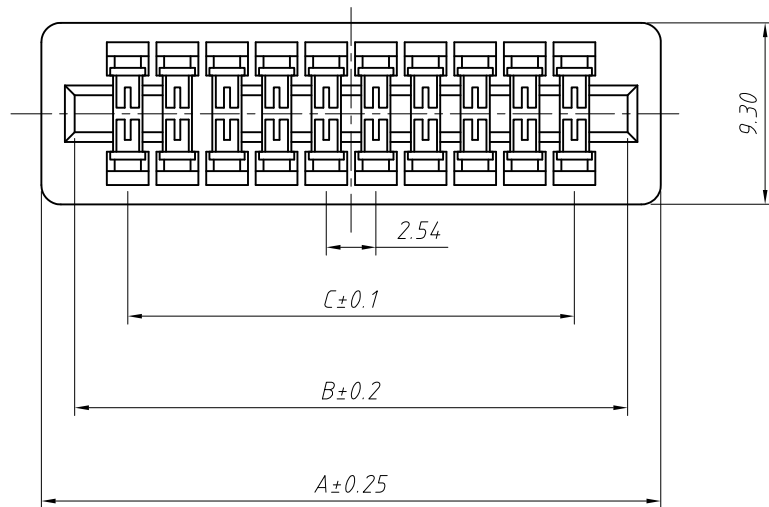

Order Information:

L-KLS1-603C-XX-S

L: RoHS

XX-No. of 10-100pin

Type:

S-Straight pin

R-Right Angle Pin

Material:

Insulator: Glass filled PBT UL 94V-0, Black

Contacts: Brass or Phosphor Bronze

Plating: Contact gold and Cutting Tin over Nickel

Electrical Characteristics:

Current Rating: 2 AMP

Contact Resistance: 30mΩ Max. at DC 100mA



Insulation Resistance: 1000MΩ Min. at 500V DC

Withstanding Voltage: 1000V AC /rms 50Hz for 1 minute

Operating Temperature: -45°C ~ +105°C

Dimension

Pin	A	B	C
06	13.92	10.52	5.08
08	16.46	13.06	7.62
10	19.00	15.60	10.16
12	21.54	18.14	12.70
14	24.08	20.68	15.24
20	31.70	28.30	22.86
22	34.24	30.84	25.40
24	36.78	33.38	27.94
26	39.32	35.92	30.48
30	44.40	41.00	35.56
36	52.02	48.62	43.18
40	57.10	53.70	48.26
44	62.18	58.78	53.34
50	69.80	66.40	60.96
60	82.50	79.10	73.66
62	85.04	81.64	76.20
72	97.74	94.34	88.90
98	138.38	134.98	129.54

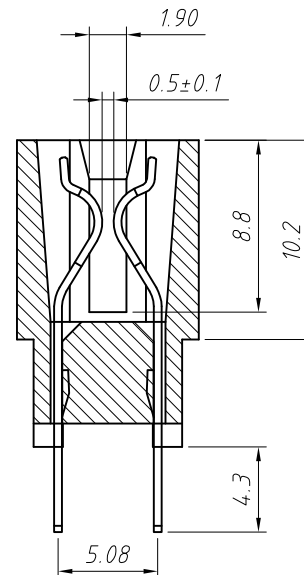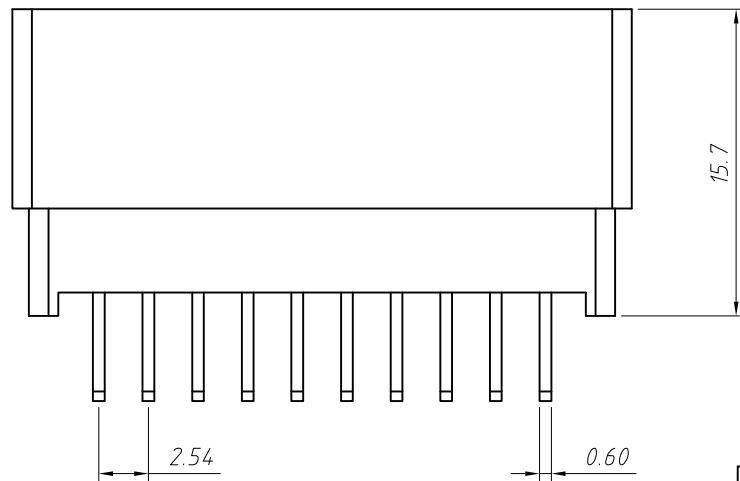

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION			Description:
X. ±0.15			X. ±5°			UNITS		mm	2.54mm Pitch Edge Card Connector Slot PCB Dip 180 Type
.X ±0.03			.X ±3°			SHEET SIZE		A4	
.XX ±0.05			.XX ±2°					KLS P/N:	L-KLS1-603C-XX-S
Draw by:	Jenny		Date:	2018-03-10		 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:			Date:	2018-03-10					
SCALE			SHEET	1	OF				