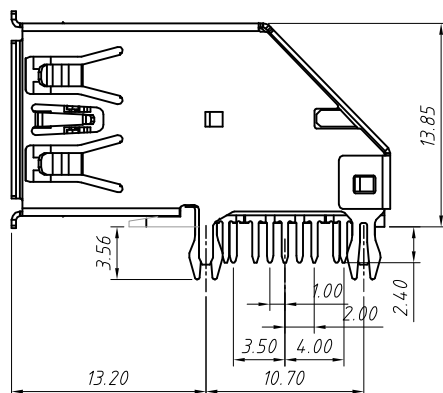

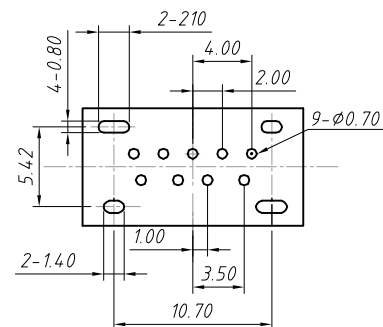
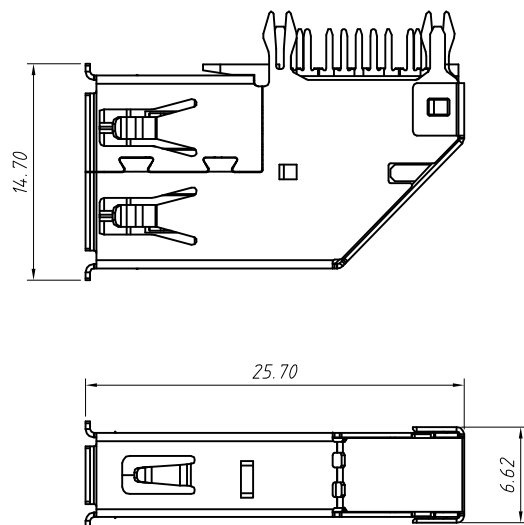


Material

Housing: 30% Glass filled PBT UL94V-0, Blue
Terminal :copper alloy(T=0.25mm), Au Plated
on contact area; Tin Plated on solder area;
Shell : Brass,Nickel plated

Electrical

Current Rating: 18A for pin 1 & pin 4
0.25A other contacts

Contact Resistance: 30m Ohm Max. for pin
1 & pin 4 50m Ohm Max.
for other contacts

Insulator Resistance: 100M Ohm Min.

Dielectric Withstanding Voltage:100 VAC/Minute

Mechanical

Operating Temperature:-55°C TO +85°C.

Mating Force: 35N MAX

Unmating Force: 10N MIN.

Order Information

L-KLS1- 317 - L
Color: L:Blue
USB AF 3.0
RoHS

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION		Description:
X. ±0.60			X. ±5°			UNITS	mm	USB 3.0 Type A Female CONN. Side R/A
.X ±0.38			.X ±3°			SHEET SIZE	A4	
.XX ±0.25			.XX ±2°				KLS P/N:	
Draw by: Date		2018-03-01						NingBo KLS ELECTRONIC CO.,L TD.
Check by:: Date		2018-03-01						
SCALE		SHEET		OF				