
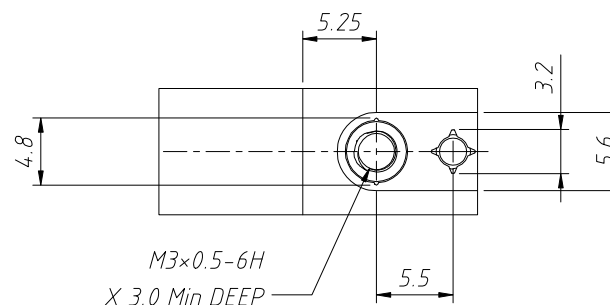
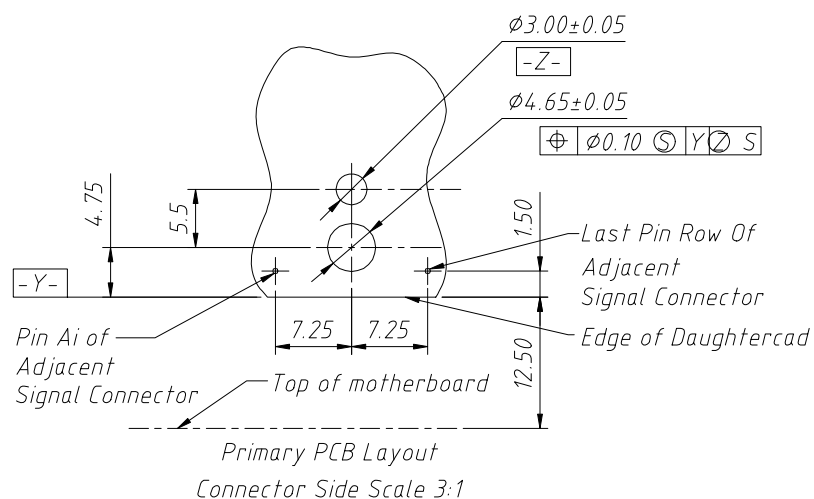


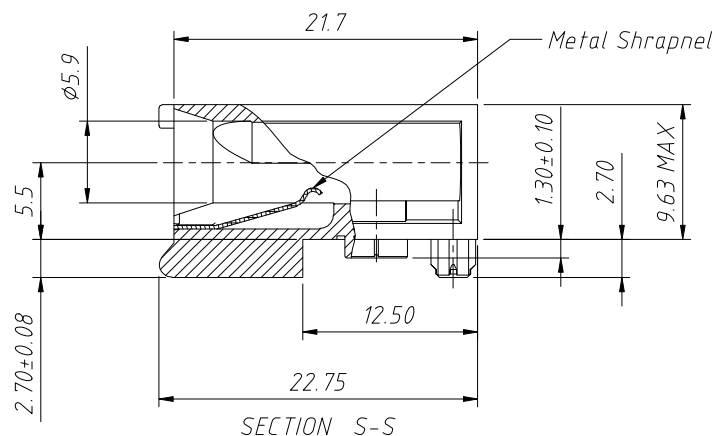
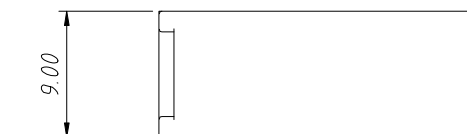


Plating: 1.27um Nickel plating,
Silver 3.81um above

1. Meet ROHS requirements
2. Burr protrusion height of product hole edge 0.05mm max
3. The product is free of yellowing and blackening after plating
4. The product surface shall be free of such undesirable phenomena as indentation, scratch, burr, etc.



ANGLE TOLERANCE	PROJECTION		Description:	 NingBo KLS ELECTRONIC CO.,L TD.
±3°			Guide bush connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2022-11-15	
x.xxx ±0.10	Check:	Daniel	2022-11-15	