

Switch

Standard Vertical Push Switch Series


KLS7-P8.5X8.5B Standard Vertical Push Switch Series

ELECTRICAL


Rating :DC30V 0.3A , DC1.6V 0.5A
Insulation Resistance :>100MΩ DC250V
Withstand Voltage :AC 250V 1 minute
Contact Resistance :<50mΩ
Soldering Temper :250°C max.3sec
Mechanical Life :100,000 cycles
Electrical Life :10,000 cycles
Ambient Temper.Used :-25°C to +65°C
Ambient Humidity Used :<85% RH
Operating force :200±80 gf




VII

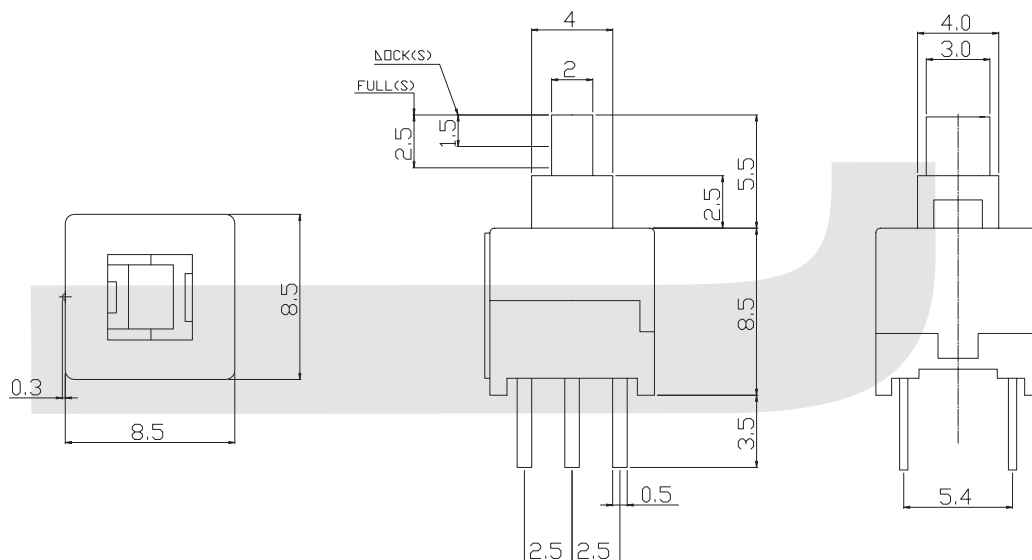


FREE



PUSH



SCHEMATIC



ORDER INFORMATION

KLS7-P8.5x8.5B X

Part Number

Standard Vertical Push Switch Series

0=Non Lock 1=Lock