

REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

Electrical :

- IEC
- 1.Rated Voltage : 250V
 - 2.Rated Current : 9A
 - 3.Wire Range: 22-18AWG
 - 4.Stripping Length : 4-5mm
 - 5.Withstanding Voltage : AC2500V/1Min.
 - 6.Operating Temperature : -40°C~+105°C
 - 7.Insulation resistance:DC500V 500MΩ
 - 8.RoHS Compliance
 - 9.Safty Approval : 
 - 10."★" is the key quality control point




GT0.75 - 4.0 -XXP - X X - 00

① ② ③ ④ ⑤ ⑥


- ① Sereies NO. ④ 1 Single Pitch
2 Double Pitch
- ② Pitch ⑤ Color: 9 White

- ③ Poles
01 01Contacts
02 02Contacts
03 03Contacts

- ⑥ Customer Request: 00--Standard

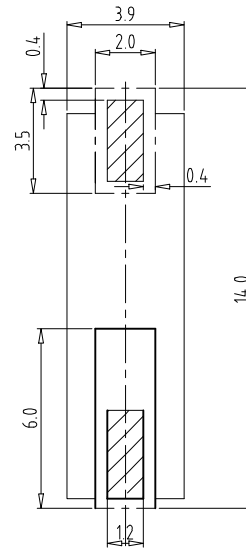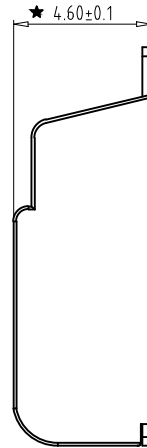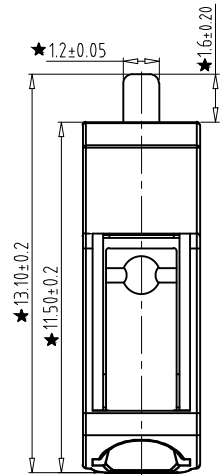

PCB LAYOUT



A	Total Pitch Tolerances									Nominal dimension range								$\perp$		$\equiv$	$-$		$//$	
	in mm									in mm														
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	100	over	
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10			100	150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5

2	CLAMP		XX	1	Phosphor bronze		Tin Plated		
1	HOUSING		XX	1	PA9T (UL94V-1)		SEE NOTE		
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL		NOTE	
DWG.	CXL	DATE	20.05.11		SIZE	A4	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE			SCALE	1:1			
APP.		DATE			NAME	GT0.75-4.0-01P-19-00			
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.									
					DWGNO.	XXXXX			