

Dimension

L	W	H
330	140	41 (1U) mm
13	5.5	1.61 (1U) inch



User's Manual



Video



Features

- 1U low profile design
- Full digital design with 93% conversion efficiency for both AC/DC and DC/AC conversion
- Ultrafast switching time between AC/DC and DC/AC of 1ms
- CB/TUV/UL 62368-1 certified, and design refer to IEC 62477 regulation
- Active current sharing up to 11000W(4+1)
- <3% Low THDi in both conversion mode
- Force charging and discharging mode with CANBus model
- Complete protections: Anti-islanding protection, AC fail protection, DC OVP, OLP, OCP, OTP
- 5 years warranty

Applications

- Battery cell formation & grading
- V2G (Vehicle-to-grid) system
- Marine battery charger module
- Electric scooter or vehicle charger station
- Kinetic energy recovery system
- Electrolysis system
- Wastewater treatment system

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

The BIC-2200 is a 2.2KW bidirectional power supply with energy recycle function. It is fully digital and 1U height designed. It is designed to control the power transferred from AC grid to DC and DC to AC grid for energy recycle. The implementation of a bidirectional power supply of the BIC-2200 allows battery manufactures to charge the battery from AC grid and recycle the DC energy back into AC grid in one single unit. With built-in functions such as active current sharing, remote ON/OFF control and CANBus model available, the BIC-2200 provides vast design flexibility for battery formation & test equipment, V2G(Vehicle-to-grid) system, charging station, laser system and kinetic recovery system.

Model Encoding / Order Information

BIC - 2200 - 12


- Communication protocol option
- Output voltage(12V/24V/48V/96V)
- Output wattage
- Series name

Type	Communication Protocol	Note
Blank	None protocol	In Stock
CAN	CANBus protocol	In Stock


SPECIFICATION

MODEL		BIC-2200-12		BIC-2200-24		BIC-2200-48		BIC-2200-96	
AC to DC Direction	OUTPUT	DC VOLTAGE		12V		24V		48V	
		RATED CURRENT		180A		90A		45A	
		RATED POWER		2160W					
		FULL POWER VOLTAGE RANGE		12 ~ 15V		24 ~ 28V		48 ~ 65V	
		RIPPLE & NOISE (max.) Note.2		160mVp-p		260mVp-p		300mVp-p	
		VOLTAGE ADJ. RANGE		10 ~ 15V		19 ~ 28V		38 ~ 65V	
		CURRENT RANGE		0 ~ 180A		0 ~ 90A		0 ~ 45A	
		VOLTAGE TOLERANCE Note.3		± 1.0%		± 1.0%		± 1.0%	
		LINE REGULATION		± 0.5%		± 0.5%		± 0.5%	
		LOAD REGULATION		± 0.5%		± 0.5%		± 0.5%	
	SETUP, RISE TIME		1800ms, 60ms/230VAC at full load						
	INPUT	AC VOLTAGE RANGE		180 ~ 264VAC					
		FREQUENCY RANGE		47 ~ 63Hz					
		POWER FACTOR (Typ.)		0.98/230VAC at full load					
		EFFICIENCY (Typ.) Note.5		90%		93%		93%	
		AC CURRENT (Typ.)		11A/230VAC					
		INRUSH CURRENT (Typ.)		COLD START 35A/230VAC					
		LEAKAGE CURRENT		<2mA/230VAC					
		TOTAL HARMONIC DISTORTION		<3%(@load=100%/230VAC)					
DC to AC Direction	INPUT (Note.9)	RATED INPUT POWER		1800W					
		FULL POWER VOLTAGE RANGE		12 ~ 15V		24 ~ 28V		48 ~ 65V	
		DC VOLTAGE RANGE		10 ~15V		19 ~ 28V		38 ~ 65V	
		MAX. INPUT CURRENT		150A		75A		37.5A	
	OUTPUT	RATED OUTPUT POWER (Typ.) (@230V, 50Hz)		1725VA					
		VOLTAGE RANGE		180 ~ 264VAC determined by AC main					
		FREQUENCY RANGE		47 ~ 63Hz determined by AC main					
		AC CURRENT (Typ.)		7.5A/230VAC					
		POWER FACTOR (Typ.)		0.99/230VAC at full load					
		EFFICIENCY (Typ.) Note.5		90.5%		93%		93%	
TOTAL HARMONIC DISTORTION		<3%(@load=100%/230VAC)							
PROTECTION	OVER LOAD			105 ~ 115% rated output power					
				AC to DC Constant current limiting, shut down DC O/P voltage 5 sec. after DC O/P voltage is down low, re-power on to recover					
			DC to AC Not accurable with constant power design						
	SHORT CIRCUIT			Shut down O/P current, re-power on to recover					
				17.6 ~ 20.8V		33.6 ~ 39.2V		72.6 ~ 86V	
	OVER VOLTAGE			Protection type : Shut down O/P voltage, re-power on to recover				134 ~ 157V	
OVER TEMPERATURE			Shut down O/P voltage, recovers automatically after temperature goes down						
ISLANDING PROTECTION			Shut down AC O/P voltage, re-power on to recover						
FUNCTION	REMOTE ON-OFF CONTROL		By electrical signal or dry contact		Short: Power ON Open: Power OFF		Please refer to the Function Manual infollowing		
	BIDIRECTION SWITCH TIME (Typ.)		1ms						
	ALARM SIGNAL		Isolated TTL signal output for T-Alarm, DC-OK and Fault. Please refer to the Function Manual in following pages						
	AUXILIARY POWER		12V@0.5A tolerance ± 5%, ripple 150mVp-p						
	BATTERY MODE RATED CURRENT(default) Note.7	AC to DC		160A		80A		40A	
				Can be adjusted by communication				20A	
DC to AC		120A		64A		32A			
		Can be adjusted by communication				16A			
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")						
	WORKING HUMIDITY		20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing						
	TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 45℃)						
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes						
SAFETY & EMC (Note 4)	SAFETY STANDARDS		UL62368-1, CAN/CSA C22.2 No.62368-1,TUV BS EN/EN62368-1, EAC TP TC 004, IEC62477-1(by request) approved						
	WITHSTAND VOLTAGE Note.8		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:500VAC						
	ISOLATION RESISTANCE Note.8		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH						
			BS EN/EN55032						
	EMC EMISSION	Parameter		Standard		Test Level / Note			
		Conducted		BS EN/EN55032 (CISPR32)		Class B			
		Radiated		BS EN/EN55032 (CISPR32)		Class A			
		Harmonic Current		BS EN/EN61000-3-2		Class A			
		Voltage Flicker		BS EN/EN61000-3-3		-----			
	EMC IMMUNITY			BS EN/EN55035, BS EN/EN61000-6-2					
		Parameter		Standard		Test Level / Note			
		ESD		BS EN/EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact			
		Radiated		BS EN/EN61000-4-3		Level 3			
		EFT / Burst		BS EN/EN61000-4-4		Level 3			
		Surge		BS EN/EN61000-6-2		2KV/Line-Line 4KV/Line-Earth			
		Conducted		BS EN/EN61000-4-6		Level 3			
		Magnetic Field		BS EN/EN61000-4-8		Level 4			
		Voltage Dips and Interruptions		BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	MTBF		462.9K hrs min. Telcordia SR-332 (Bellcore) ; 46K hrs min. MIL-HDBK-217F (25℃)						
	DIMENSION		330*140*41mm (L*W*H)						
	PACKING		2.9Kg; 4pcs/12.6Kg/1.25CUFT						
NOTE									


■ BLOCK DIAGRAM

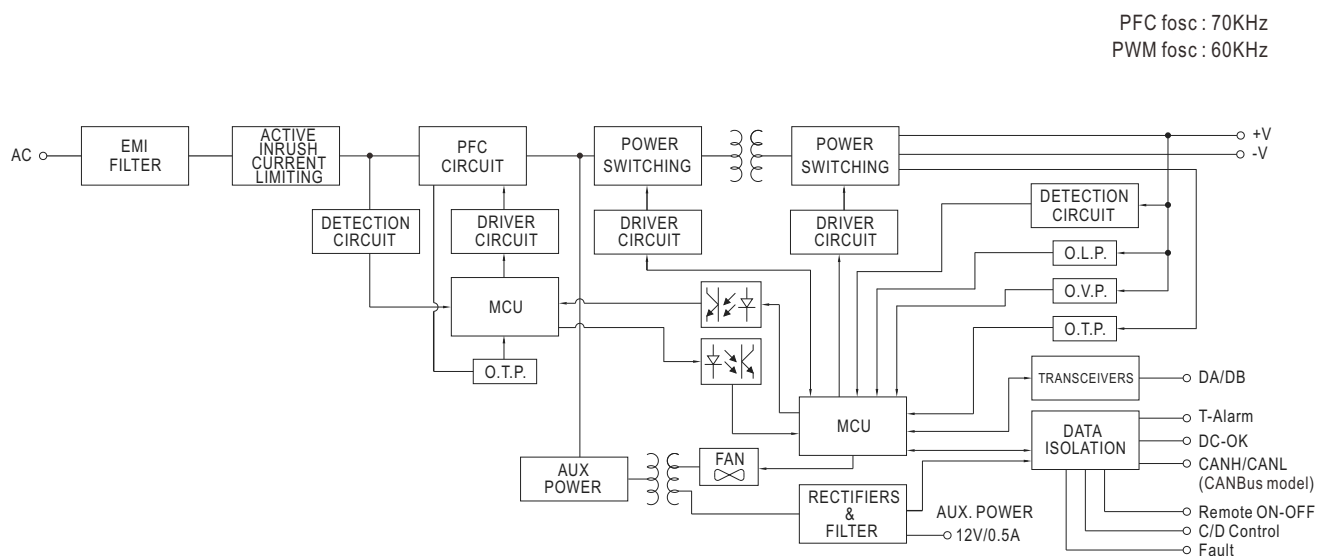

■ DERATING CURVE

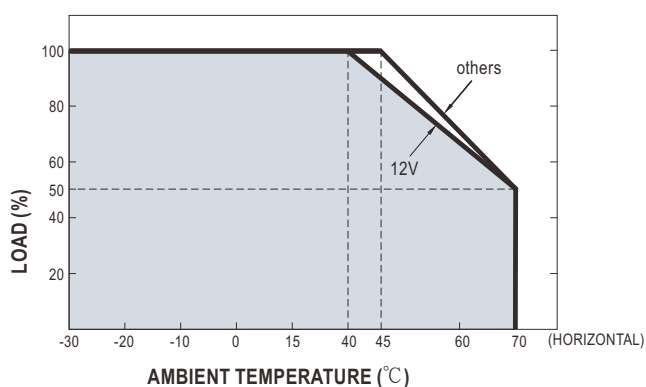


■ STATIC CHARACTERISTICS

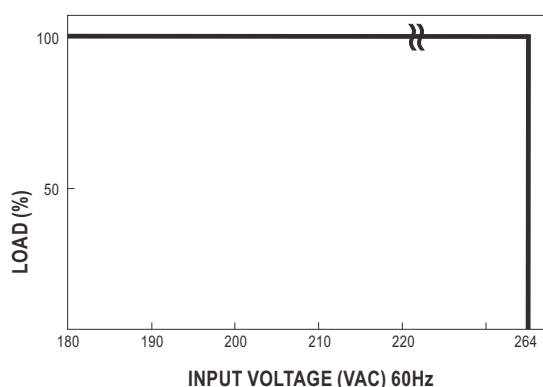

Case No. 277C

Unit:mm

MECHANICAL SPECIFICATION

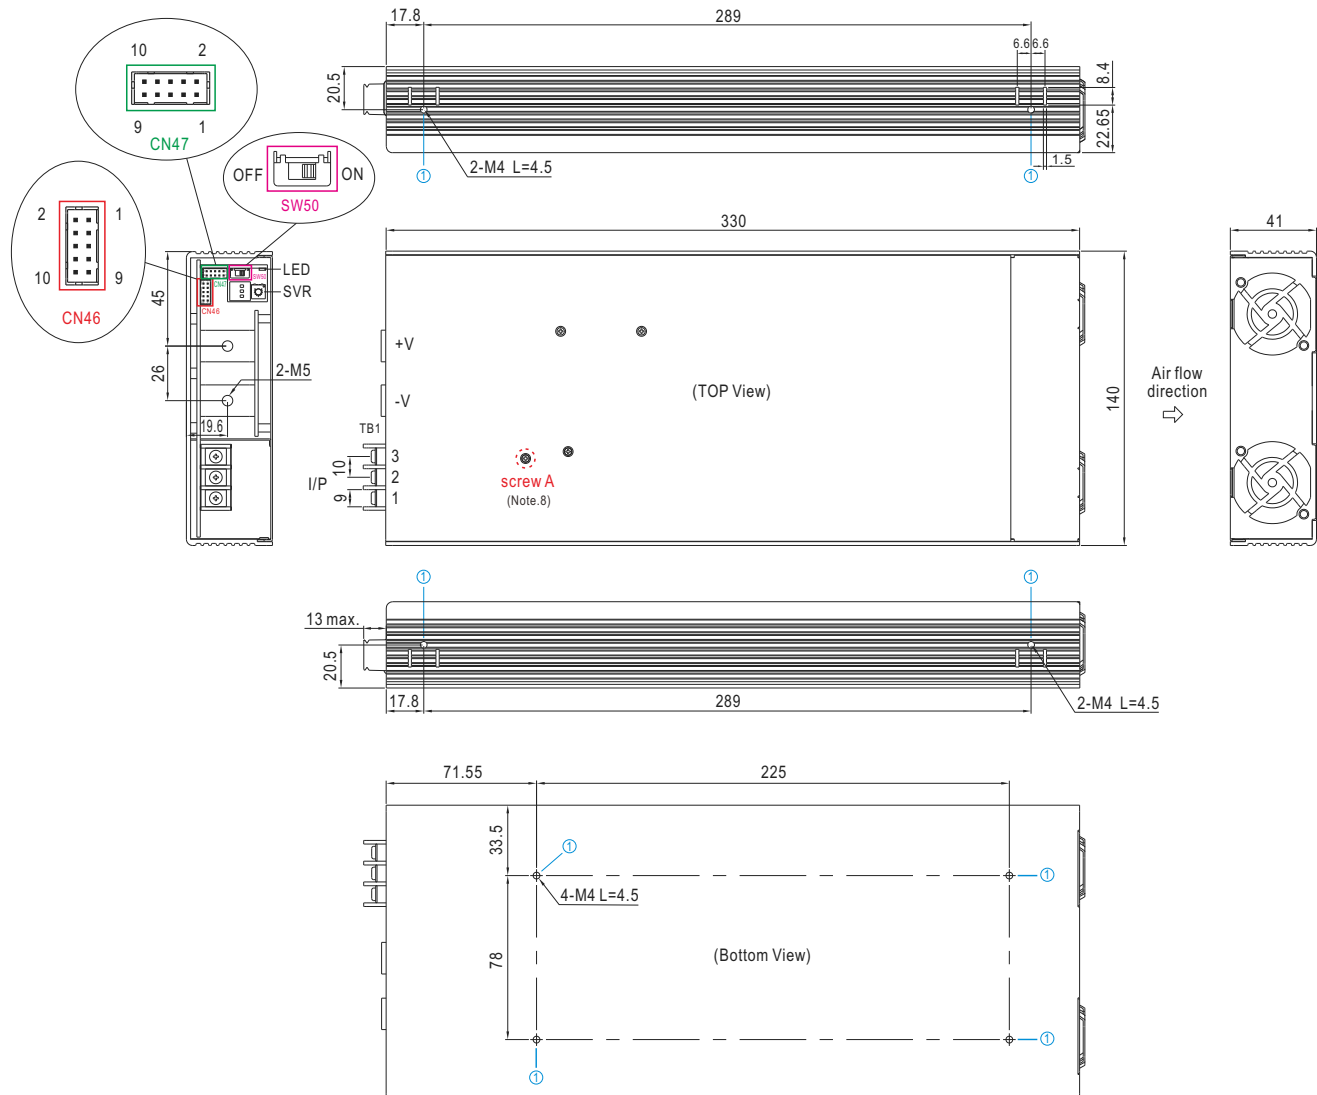

AC Input Terminal(TB1) Pin NO. Assignment

Pin No.	Assignment	Terminal	Max mounting torque
1	AC/L	DECA T35-EO32-03	18Kgf-cm
2	AC/N		
3	FG ≐		

DC Output Terminal Pin No. Assignment


Assignment	Diagram	Maximum mounting torque
+V, -V		10Kgf-cm

※ LED Status Indicators


LED	Description
Green	AC to DC Direction, functions as regular power supply.
Green	DC to AC Direction, functions as grid inverter.
Red	Abnormal status (Over temperature protection, Overload protection, Fan fail.)
Light	
Flash	

※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M4	4.5mm	7~10Kgf-cm

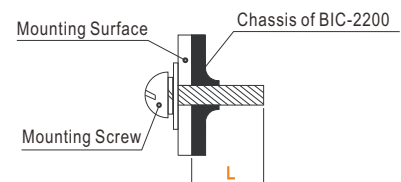

※Control Pin No. Assignment(CN46) : HRS DF11-10DP-2DS or equivalent




Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-10SC or equivalent

Pin No.	Function	Description
1	+12V-AUX	Auxiliary voltage output, 11.4~12.6V, referenced to GND-AUX (pin 2,4). The maximum output current is 0.5A. This output is not controlled by the Remote ON/OFF control.
2,4	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
3	+5V-AUX	Auxiliary voltage output, 4.5~5.5V, referenced to GND-AUX (pin 2,4) only for Remote ON/OFF used. This output is not controlled by the Remote ON/OFF control.
5	Remote ON-OFF	The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF and +5V-AUX(pin 3). (Note.1)
6	C/D Control (Note.2)	High (4.5 ~ 5.5V) : Battery Charging mode Low (-0.5 ~ 0.5V) : Battery Discharging mode (Note.1)
7	DC-OK	High (4.5 ~ 5.5V) : When the Vout ≤ 80%±5%. Low (-0.5 ~ 0.5V) : When Vout ≥ 80%±5%. The maximum sourcing current is 4mA and only for output. (Note.1)
8	Fault	High (4.5 ~ 5.5V) : When the Vac ≤ 165Vrms, OLP, SCP, OTP, OVP, AC Fail, fan lock, islanding protection. Low (-0.5 ~ 0.5V) : When Vac ≥ 175Vrms and when power supply work normally. The maximum sourcing current is 4mA and only for output. (Note.1)
9	T-ALARM	High (4.5 ~ 5.5V) : When the internal temperature exceeds the limit of temperature alarm, or when any of the fans fails. Low (-0.5 ~ 0.5V) : When the internal temperature is normal, and when fans work normally. The maximum sourcing current is 4mA and only for output(Note.1)
10	NC	-----

Note 1 : Isolated signal, referenced to GND-AUX.

Note 2 : CANBus model only.

※Control Pin No. Assignment(CN47): HRS DF11-10DP-2DS or equivalent



Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-10SC or equivalent

Pin No.	Function	Description
1,2	DA	Differential digital signal for parallel control. (Note.1)
3,4	DB	
5,6	GND	Negative output voltage signal. Certain function reference. It can not be connected directly to the load.
7	CANH (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
8	CANL (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
9,10	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).

Note 1 : Non-isolated signal, referenced to GND.

Note 2 : Isolated signal, referenced to GND-AUX.

◎ Bidirection process

BIC-2200 possesses AC to DC and DC to AC two way conversion functions. The conversion direction can be automatically detected and controlled by BIC-2200's internal firmware or manually switched by users according to different application requirements. Before entering detailed function explanation. Please refer to following definitions.

AC to DC (Energy absorbing and charging/ power supplying):

The BIC-2200 converts AC energy from the grid into DC energy for the battery or the loads. The operation principle is the same as an ordinary power supply or a charger.



DC to AC (Energy recycling and discharging):


Opposite to the AC to DC conversion, the BIC-2200 converts DC energy from the battery or loads into AC energy, then feeding back to the grid. AC output synchronization range is 180Vac~264Vac/47Hz~63Hz, the bidirectional power supply can work normally as long as the AC grid is within the range.



Bi-direction auto-detect mode:

This is default factory setting, BIC-2200 operates as table below

Condition	Mode
Set voltage > load voltage	AC to DC
Set voltage < load voltage	DC to AC

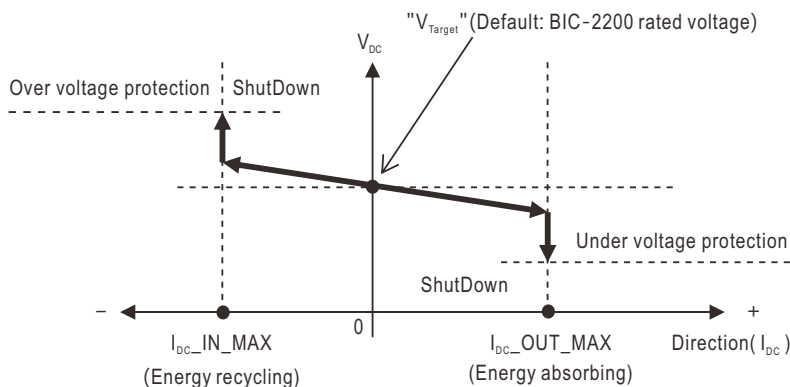

Operating characteristic curve

Note:Detail of set voltage, please refer to user's manual.

Bi-direction battery mode:

This mode only can be activated by CANBus model. Set the BIC-2200 in AC to DC (charging) or DC to AC (discharging) conversion directly through command DIRECTION_CTRL below.

Command	Conversion
DIRECTION_CTRL = 00h	AC to DC (charging)
DIRECTION_CTRL = 01h	DC to AC (discharging)



◎ Current Sharing

BIC-2200 has the built-in active current sharing function and can be connected in parallel, up to 5 units, to provide higher output power as exhibited below :

- ※ The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- ※ In parallel connection, power supply with the highest output Voltage will be the master unit and its Vout will be the DC bus voltage.
- ※ The total output current must not exceed the value determined by the following equation:
Maximum output current at parallel operation=(Rated current per unit) × (Number of unit) × 0.95
- ※ When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit) × (Number of unit) the current shared among units may not be balanced.
- ※ Under parallel operation ripple of the output voltage may be higher than the SPEC at light load condition. It will go back to normal ripple level once the output load is more than 5%.
- ※ CN47/SW50 Function pin connection

Parallel	PSU1		PSU2		PSU3		PSU4		PSU5	
	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50
1 unit	X	ON	—	—	—	—	—	—	—	—
2 unit	V	ON	V	ON	—	—	—	—	—	—
3 unit	V	ON	V	OFF	V	ON	—	—	—	—
4 unit	V	ON	V	OFF	V	OFF	V	ON	—	—
5 unit	V	ON	V	OFF	V	OFF	V	OFF	V	ON

(V : CN47 connected ; X : CN47 not connected)

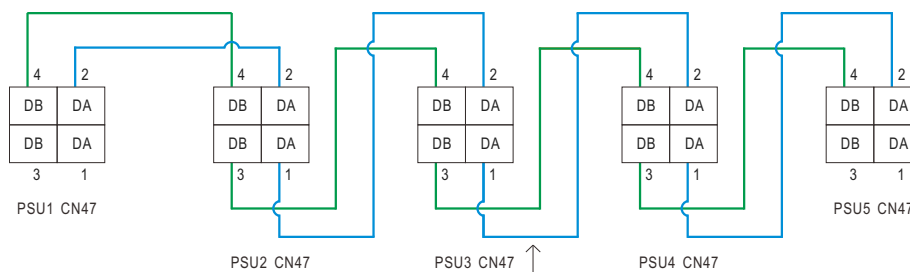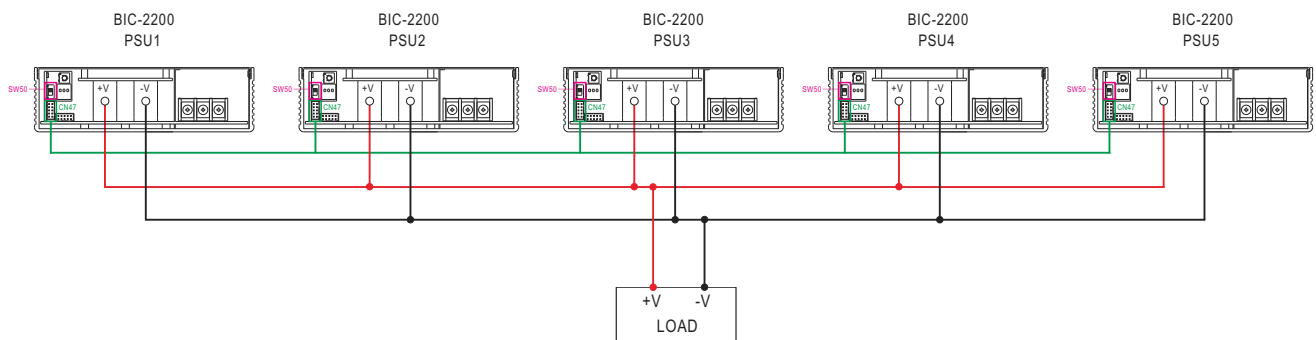


If the lines of CN47 are too long, they should be twisted in pairs to avoid the noise.

◎ DA,DB connected mutually in parallel.

GUIDANCE OF ADDITIONAL FILTER

1.Schematic

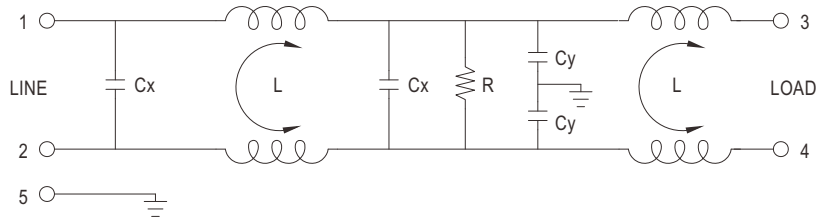

2.Minimum insertion loss (In dB at 50 Ω system): Filter model 30DPGS5C or equivalent

FREQ. MHz	0.01	0.05	0.10	0.15	0.50	1.0	5.0	10	30
COM. MODE dB	2	5	8	10	30	35	55	45	30
DIF. MODE dB	4	15	18	18	45	50	40	40	40

3.Configuration

