

## Switch

### Tact Switch Series


#### KLS7-TS3603 3x6 Tact Switch Series

##### ELECTRICAL



- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-30°C~+120°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C



##### Dimension (unit: mm)

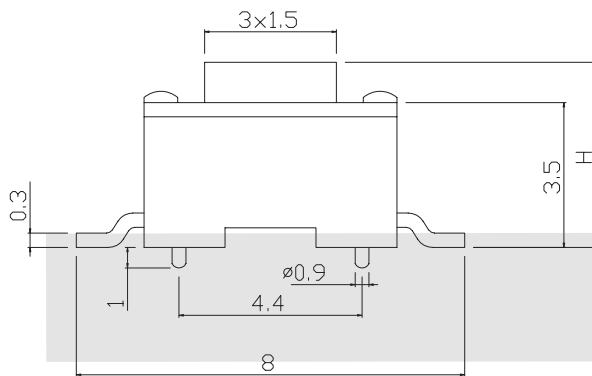

| H   |
|-----|
| 4.3 |
| 5.0 |

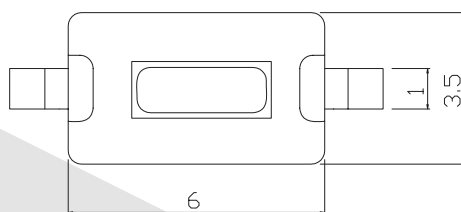

PCB LAYOUT

### ORDER INFORMATION

KLS7-TS3603 -4.3-180 -B

Series No.      Packing: B=Bulk    T=Tape  
Hight: 4.3mm/5.0mm      Operating Force :180~250gf

## Tact Switch Series


### KLS7-TS3603B 3x6 Tact Switch Series

#### ELECTRICAL



- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-30°C~+120°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C



#### Dimension (unit: mm)

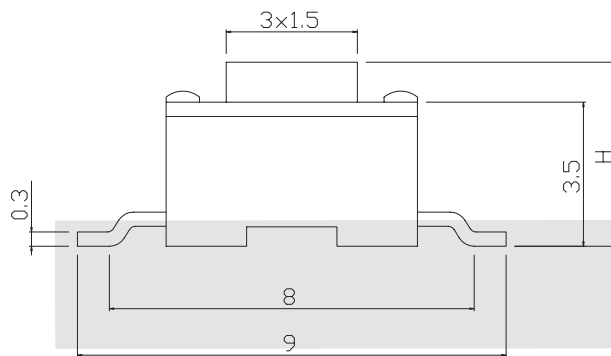

| H   |
|-----|
| 4.3 |
| 5.0 |

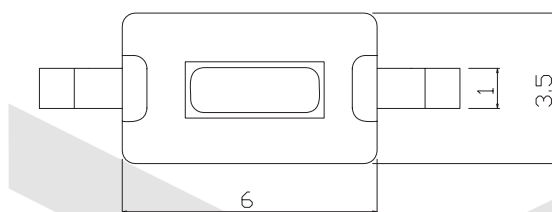

## ORDER INFORMATION

KLS7-TS3603B -4.3-180 -B

Series No. \_\_\_\_\_ Packing: B=Bulk T=Tape  
Hight: 4.3mm/5.0mm \_\_\_\_\_ Operating Force :180~250gf