




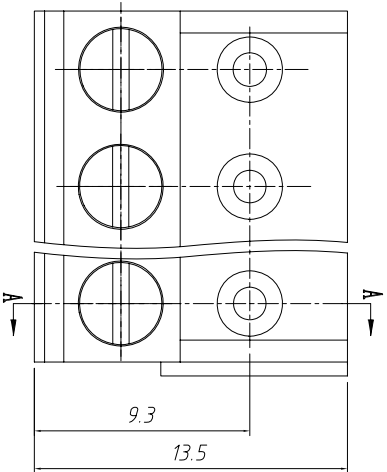


Material
Screw: M2.5, Steel,Zn plated
Shrapnel: Phosphor bronze, Nickel plated
Pin header: Brass, Tin plated
Housing: PA66 or PBT, UL94V-0

Electrical
Rated voltage: 300V
Rated current: 10A
Wire range: 28~16AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Torque: 0.4 N.m (3.5Lb. in)
Strip length: 4.5~5 mm

Order Information

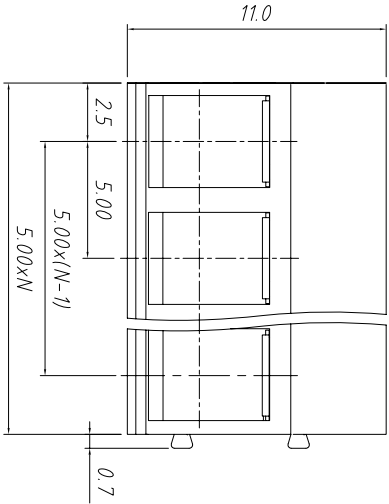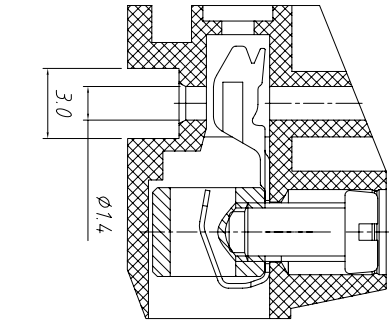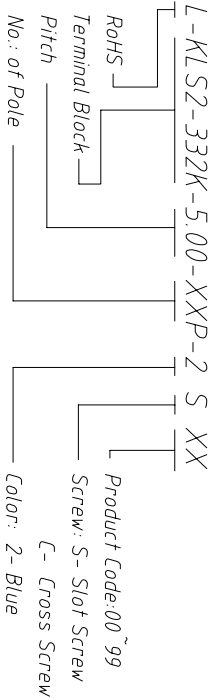

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X. ± 0.60		X. $\pm 5^{\circ}$		UNITS		Screw CONN TERM BLOCK 5.00MM	
.X ± 0.38		.X $\pm 3^{\circ}$		SHEET SIZE	mm		
.XX ± 0.25		.XX $\pm 2^{\circ}$			A4		
Draw by: Date		2015-09-01		KLS P/N:		KLS2-332K-5.00-XXP-2S	
Check by: Date		2015-09-15					
SCALE		SHEET		OF			
KLS ELECTRONIC CO., LTD.							