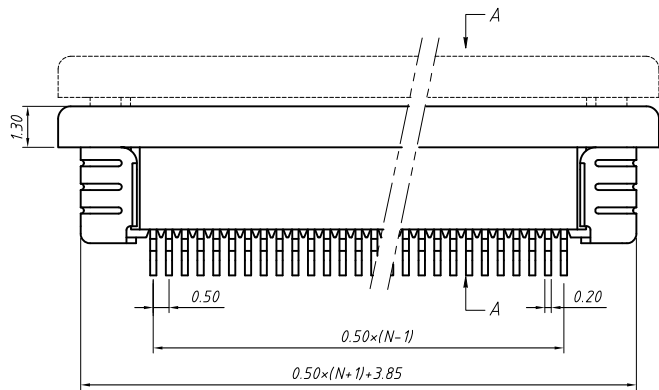


Material

Housing: LCP UL 94 V-0

Terminal: Phosphor Bronze Tin-plated

Fitting Nial: Phosphor Bronze Tin-plated

Electrical

Voltage rating: 50 V

Current rating: 0.4 A


Withstanding Voltage: 200 V

Insulation resistance: 500M Ω .Min.


Contact resistance: 20 m Ω .Max.

Mechanical

Temp. Range: -25 °C ~ +85 °C

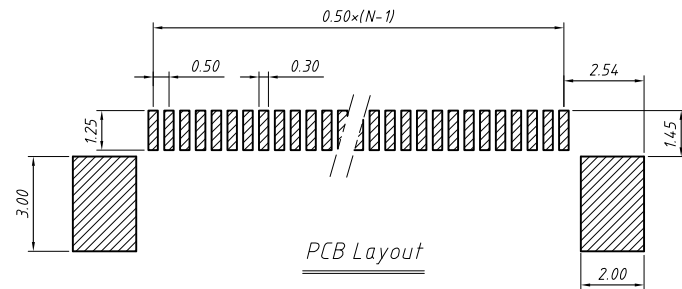

PCB Layout

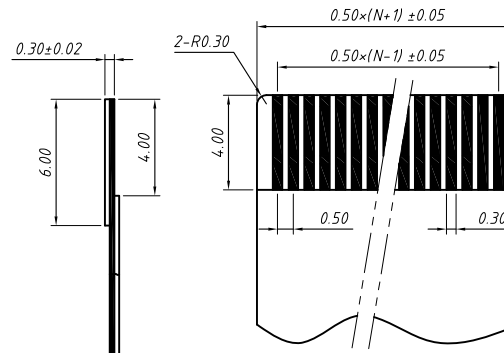

Proper Cable

Order Information

L-KLS1- 1242E - 2.0- XX - T-U-R

Pack:
T-Tube R-Reel
U-Upper Contact
T-SMT Pin
No.Of pins
(06 ~ 60 pins)
Height: 2.0mm
Series No.
Pos. NO.
RoHS

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	Description:
X. ± 0.15		X. $\pm 5^\circ$		UNITS	
.X ± 0.03		.X $\pm 3^\circ$		SHEET SIZE	CONN FFC 0.50mm, SMD, Horizontal, Upper Contact, with ZIF
.XX ± 0.05		.XX $\pm 2^\circ$		KLS P/N:	




Draw by: Date 2018-03-10

Check by: Date 2018-03-10

SCALE SHEET OF



NingBo KLS ELECTRONIC CO.,L TD.

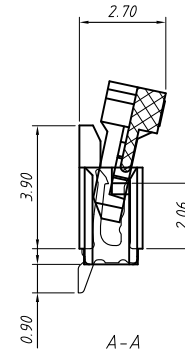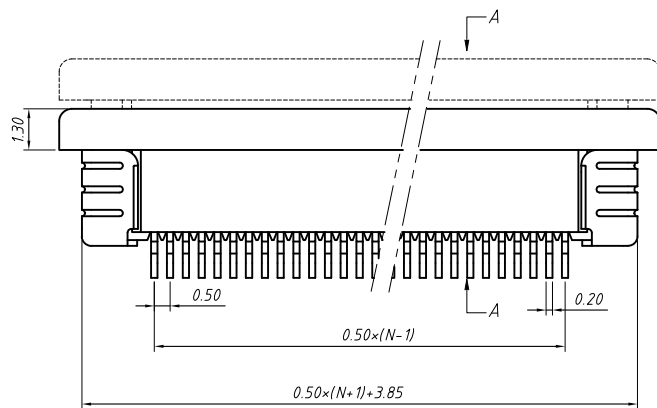

Material

Housing: LCP UL 94V-0

Terminal: Phosphor Bronze Tin-plated

Fitting Nial: Phosphor Bronze Tin-plated

Electrical

Voltage rating: 50 V

Current rating: 0.4 A

Withstanding Voltage: 200 V

Insulation resistance: 500M Ω .Min.

Contact resistance: 20 m Ω .Max.



Mechanical

Temp. Range: -25 °C ~ +85 °C


Order Information

L-KLS1- 1242E - 2.0- XX - T-L-R

Pack:
T-Tube R-Reel
L-Lower Contact
T-SMT Pin
No.Of pins
(06 ~ 60 pins)
Height: 2.0mm
Series No.
Pos. NO.
RoHS

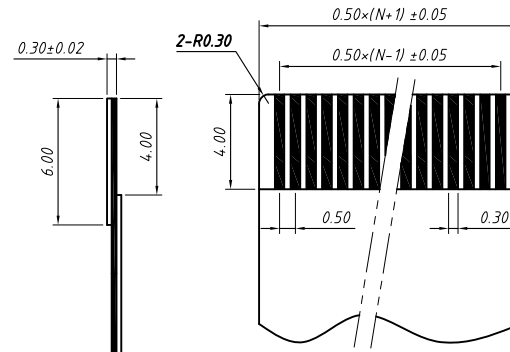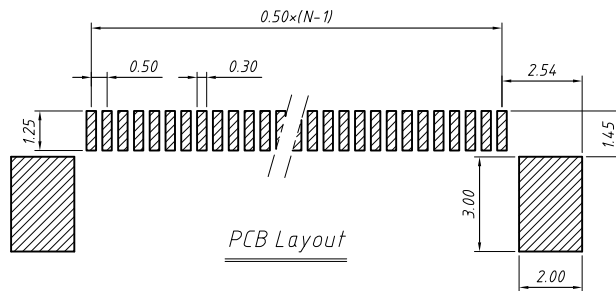

Proper Cable

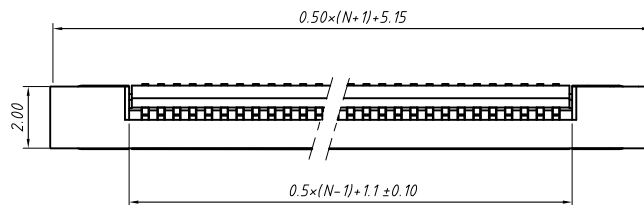

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	mm
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	A4
.XX ± 0.05	.XX $\pm 2^\circ$	KLSP/N:	L-KLS1-1242E-2.0-XX-T-L-R

Draw by: Date 2018-03-10

Check by: Date 2018-03-10

SCALE SHEET OF



NingBo KLS ELECTRONIC CO.,L TD.

CONN FFC 0.50mm,SMD,
Horizontal,Lower Contact , with ZIF