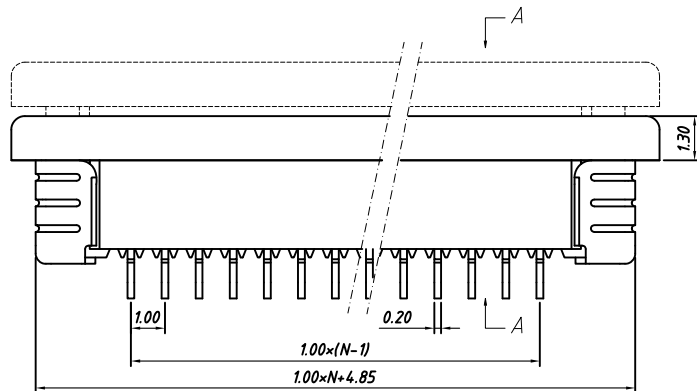


Material

Housing: LCP UL 94V-0

Lock: LCP UL 94V-0

Plug spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage rating: 50 V

Current rating: 0.4 A



Withstanding Voltage: 500 V

Insulation resistance: 500M Ω .Min.

Contact resistance: 20 m Ω .max.

Mechanical

Temp. Range: -25 °C ~ +85 °C

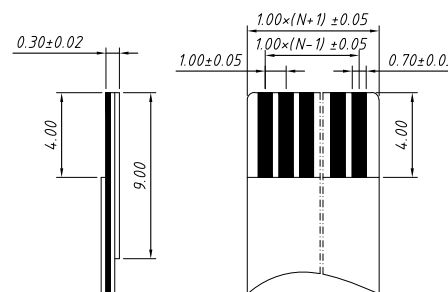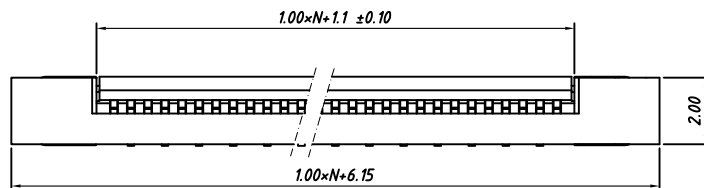

Proper Cable

Order Information

L-KLS1- 240F - 2.0- XX -T-U-R

Pack:

T-Tube R-Reel

U-Upper Contact

T-SMT Pin


No.Of pins
(02~30 pins)

Height: 2.0mm

Series No.

Pos. NO.

RoHS

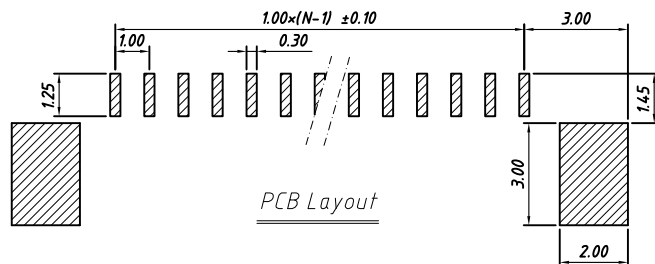

PCB Layout

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	mm
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	A4
.XX ± 0.05	.XX $\pm 2^\circ$	KLS P/N:	L-KLS1-240F-2.0-XX-T-U-R

Draw by: Date

2018-03-10

Check by: Date

2018-03-10

SCALE

SHEET

OF



NingBo KLS ELECTRONIC CO.,L TD.

CONN FFC 1.00mm,

SMD,Horizontal,Upper Contact ,with ZIF

Material

Housing: LCP UL 94V-0

Lock: LCP UL 94V-0

Plug spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage rating: 50 V

Current rating: 0.4 A

Withstanding Voltage: 500 V

Insulation resistance: 500M Ω .Min.

Contact resistance: 20 m Ω .max.

Mechanical

Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 240G - 2.0- XX -T-L-R

Pack:

T-Tube R-Reel

L-Lower Contact

T-SMT Pin





No.Of pins
(02~30 pins)

Height: 2.0mm


Series No.

Pos. NO.

RoHS

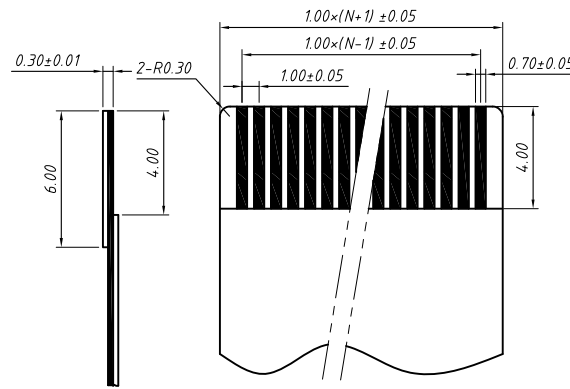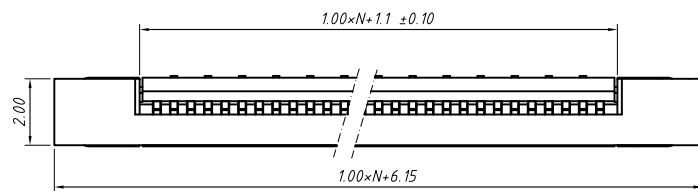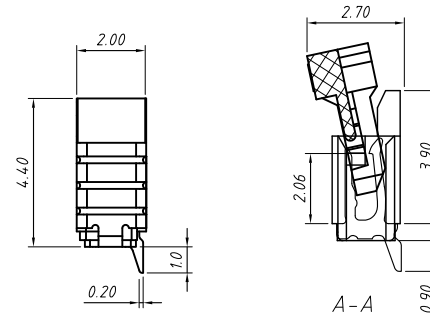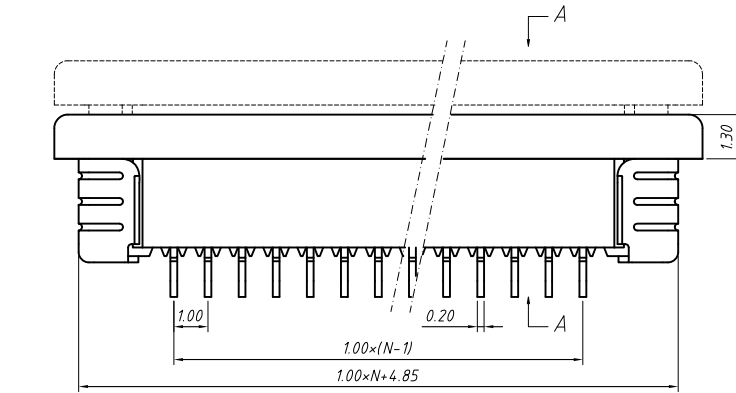

Proper Cable

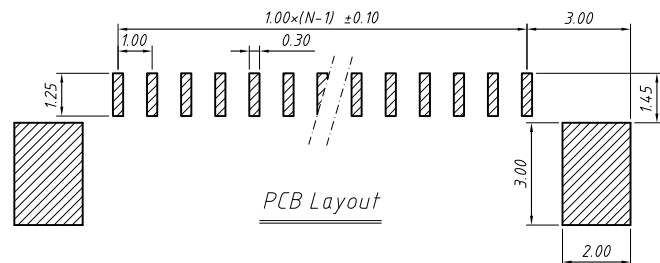

PCB Layout

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	mm
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	A4
.XX ± 0.05	.XX $\pm 2^\circ$	KLS P/N:	L-KLS1-240G-2.0-XX-T-L-R

Draw by: Date 2018-03-10

Check by: Date 2018-03-10

SCALE SHEET OF



NingBo KLS ELECTRONIC CO.,L TD.

CONN FFC 1.00mm,
SMD,Horizontal,Lower Contact , with ZIF